



DRIVER CC LINEAR MULTI-CORRENTE

DRIVER CC LINEAR MULTI CORRENTE TCI 200-350MA 30-270VDC MP80/350SLI

DRIVER CC LINEAL MULTICORRIENTE TCI 200-350MA 30-270VDC
MP80/350SLI

MULTI CURRENT CC LINEAR DRIVER TCI 200-350MA 30-270VDC
MP80/350SLI

REF. 20122212




CARACTERÍSTICAS | CARACTERÍSTICAS | CHARACTERISTICS

TEMPERATURA <i>Temperatura Temperature</i>	-25°C a 50°C
NORMAS DE SEGURANÇA <i>Estándares de seguridad Safety standards</i>	EN 55015, EN 60598-2-22, EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-13, EN 61547, EN 62384
PROTEÇÃO <i>Protecciones Protection</i>	Sobrecarga <i>Sobre Carga Overload</i> Curto Circuito <i>Corto Circuito Shortcut</i> Picos de tensão <i>Picos de tensão Voltage spikes</i>
FREQUÊNCIA <i>Frecuencia Frequency</i>	50-60HZ
VOLTAGEM <i>Tensión Voltage</i>	220-240V
PESO <i>Peso Weight</i>	140g

VOLTAGEM <i>Tensión Voltage</i>	POTÊNCIA <i>Potencia Power</i>	CORRENTE <i>Corriente Current</i>
30-270 Vdc	54 W	200 mA
30-270 Vdc	56.5 W	210 mA
30-270 Vdc	59 W	220 mA
30-270 Vdc	62 W	230 mA
30-270 Vdc	64.5 W	240 mA
30-270 Vdc	67.5 W	250 mA
30-270 Vdc	70 W	260 mA
30-270 Vdc	72.5 W	270 mA
30-270 Vdc	75.5 W	280 mA
30-270 Vdc	78 W	290 mA
30-266 Vdc	80 W	300 mA
30-258 Vdc	80 W	310 mA
30-250 Vdc	80 W	320 mA
30-242 Vdc	80 W	330 mA
30-235 Vdc	80 W	340 mA
30-228 Vdc	80 W	350 mA

DIMENSÕES | DIMENSIONES | DIMENSIONS

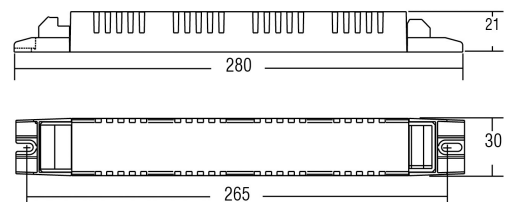

WWW.MOTAKO.PT

email: info@tako.pt | Tel.: +351 261 027 304