


IP50 Clear Heat Shrink Tube Flexible LED Strip

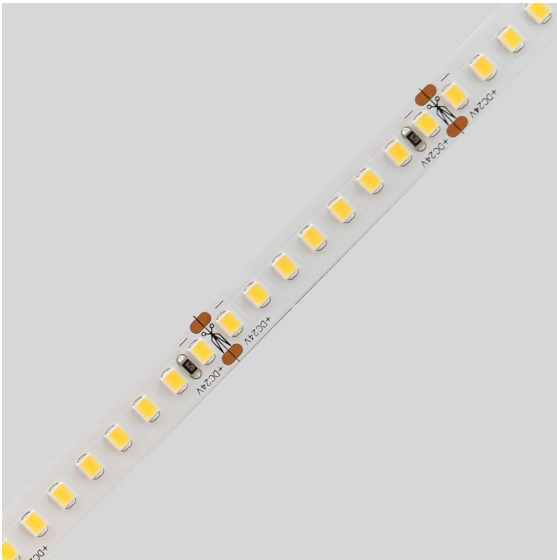


9.6W/M 2835 SMD 128LEDs/m DC24V

BASIC PARAMETERS

Size	5000x9x2mm
Cutting Unit	62.5mm
Input Voltage	24VDC
Input Current	0.4A/m
SDCM	<5
Copper foil	2oz
Back Tape	3M 300LSE
Max. run	5meter
Lead wire	Both end UL red-black 20AWG 150mm
Lifetime	L70/B50>50000hrs
LM-80	>54000hrs



DRAWING

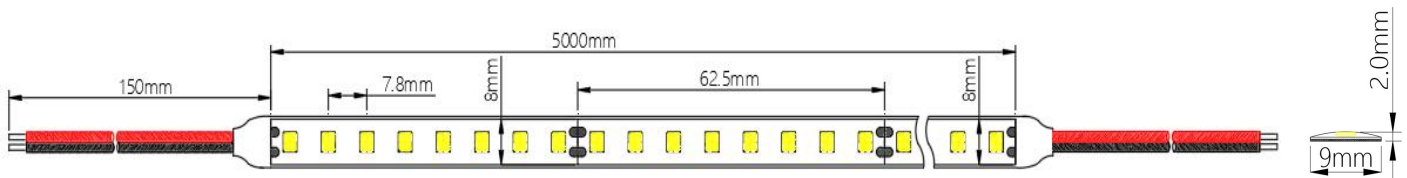

TECHNICAL DETAILS

PART NO.	LED QTY	Watt/m	CRI	Voltage	PCB	LED	CCT	LM/M	LM/W	ERP
LC-T28WW2412808P5-NF827-9.6							2700K	1185	123	E
LC-T28BW2412808P5-NF830-9.6							3000K	1258	131	E
LC-T28NW2412808P5-NF840-9.6	128LEDs/m	9.6	Ra>80	24V	8mm	2835	4000K	1300	135	E
LC-T28CW2412808P5-NF865-9.6							6500K	1300	135	E

Remark:

- Data with ±10% tolerance
- If the power exceeds 14.4W, an additional aluminum profile is required to dissipate heat.