



DRIVE CC MULTICORRENTE

DRIVE CC MULTICORRENTE 300-1050MA 3-44VDC

DRIVE CC MULTICORRIENTE 300-1050MA 3-44VDC

MULTI CURRENT CC DRIVE 300-1050MA 3-44VDC

REF. 20127484N



CARACTERÍSTICAS | CARACTERÍSTICAS | CHARACTERISTICS


TEMPERATURA <i>Temperatura Temperature</i>	-25°C a 40°C
NORMAS DE SEGURANÇA <i>Estándares de seguridad Safety standards</i>	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-13, EN 61547, EN 62384, VDE 0710-T14
PROTEÇÃO <i>Protecciones Protection</i>	Sobrecarga <i>Sobre Carga Overload</i> Curto Circuito <i>Corto Circuito Shortcut</i> Picos de tensão <i>Picos de tensión Voltage spikes</i> Sobreaquecimento <i>Sobrecalentamiento Overheating</i>
FREQUÊNCIA <i>Frecuencia Frequency</i>	50-60HZ
VOLTAGEM <i>Tensión Voltage</i>	198-264VAC
PESO <i>Peso Weight</i>	122g



TCI LED
professional led applications

VOLTAGEM <i>Tensión Voltage</i>	POTÊNCIA <i>Potencia Power</i>	CORRENTE <i>Corriente Current</i>
3-44 Vdc	13 W	300 mA
3-44 Vdc	15 W	350 mA
3-44 Vdc	18 W	400 mA
3-44 Vdc	20 W	450 mA
3-44 Vdc	22 W	500 mA
3-44 Vdc	24 W	550 mA
3-44 Vdc	27 W	600 mA
3-44 Vdc	29 W	650 mA
3-44 Vdc	31 W	700 mA
3-44 Vdc	32 W	750 mA
3-42 Vdc	33 W	800 mA
3-42 Vdc	35 W	850 mA
3-42 Vdc	38 W	900 mA
3-42 Vdc	40 W	950 mA
3-42 Vdc	42 W	1000 mA
3-40 Vdc	42 W	1050 mA

DIMENSÕES | DIMENSIONES | DIMENSIONS

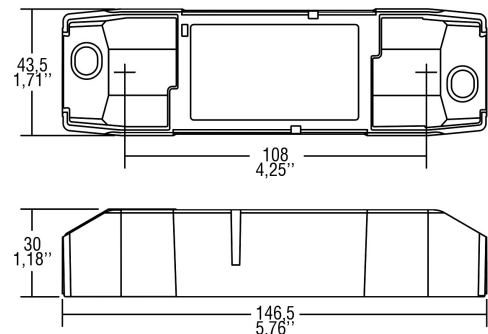

WWW.MOTAKO.PT

email: info@tako.pt | Tel.: +351 261 027 304