


DRIVE CC LINEAR MULTI-CORRENTE

DRIVE CC LINEAR MULTI CORRENTE 200-350MA 20-120VDC MPSE40/350S

REF. 20127527



30-120VDC	24W	200mA
30-120VDC	25.2W	210mA
30-120VDC	26.4W	220mA
30-120VDC	27.6W	230mA
30-120VDC	28.8W	240mA
30-120VDC	30W	250mA
30-120VDC	31.2W	260mA
30-120VDC	32.4W	270mA
20-120VDC	33.6W	280mA
20-120VDC	34.8W	290mA
20-120VDC	36W	300mA
20-120VDC	37.2W	310mA
20-120VDC	38.4W	320mA
20-120VDC	39.6W	330mA
20-118VDC	40W	340mA
20-115VDC	40W	350mA

FREQUÊNCIA	50-60Hz
INTERVALO TENSÃO AC	198 - 264V
INTERVALO TENSÃO DC	176 - 276V


SEGURANÇA

NORMAS DE SEGURANÇA	EN 55015, EN 60598-2-22, EN 61000-3-2, EN 61000-3-3, EN 61347-1, EN 61347-2-13, EN 61547, EN 62384
---------------------	--

EMBALAGEM

DIMENSÃO	237 x 30 x 21mm
----------	-----------------

5
ANOS
GARANTIA

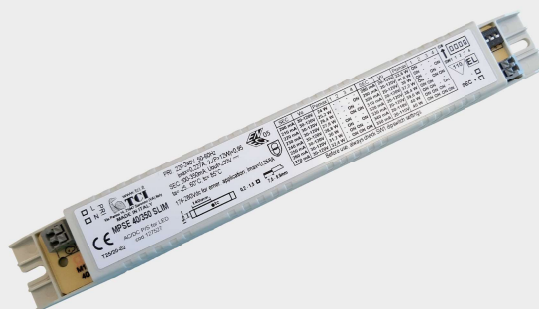

TCI LED
professional led applications

DIMENSÕES

